

## Subject to technical alterations and printing errors • First edition 12/2012; Revised 07/2014

## System Data Sheet "Driveway for Trucks" with Elastodrain® EL 202



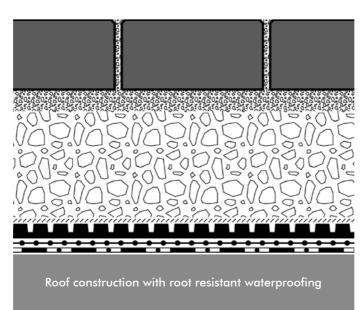

Build-up height: from ca. 320 mm
Build-up weight: from ca. 623 kg/m²

Paving slabs

Depth ≥ 120 mm for vehicles up to 16 t ≥ 140 mm for vehicles up to 60 t

Bedding layer, 30-50 mm

Gravel base layer, depth min. 150 mm

Filter Sheet PV
Elastodrain® EL 202
Slip Sheet TGF 20, 2 layers for a sliding coat
Roof construction with adequate waterproofing and sufficient load bearing
capacity

## Description

- Heavy-duty build-up, preferably to be used in driveways, emergency access roads and parking areas.
- Elastodrain® 202 is also suitable for the realization of walkways, terrace areas and playgrounds.
- For the application of larger amounts of substrate Elastodrain<sup>®</sup> EL 202 can be driven on directly with wheel loaders or similar vehicles.
- The drainage capacity meets the requirements of German Standard DIN 4095.
- "Spade resistant" protection layer made of solid recycled rubber meeting the requirements of German Standard DIN 18195.

